



PASSENGER ELEVATOR (STANDARD DESIGN)




MODEL: KYC301

Ceiling: Painted steel, LED

Car Wall: Hairline stainless steel

Floor: PVC


• MR PASSENGER ELEVATOR | Drawing

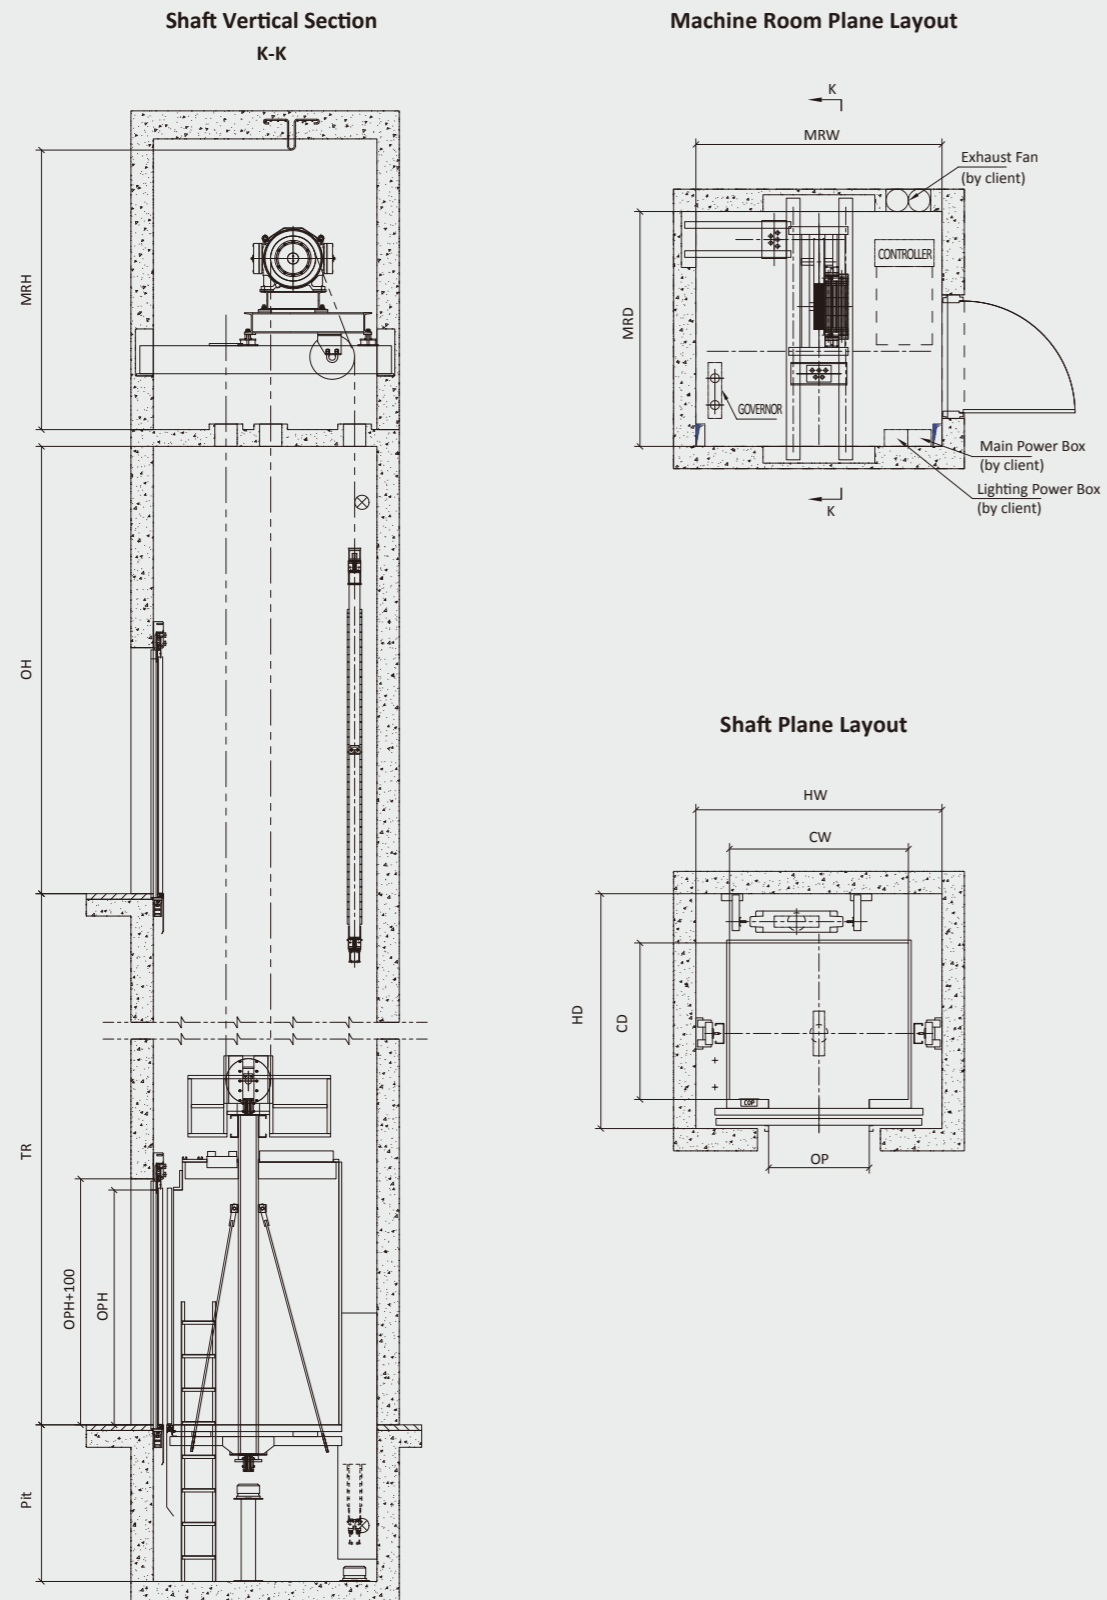

| Parameter Table

Type	Persons	Rated Speed (m/s)	TR (m)	OH (mm)	Pit (mm)	Opening Size OP×OPH (mm)	Car Size CW×CD×CH (mm)	Shaft Size HW×HD (mm)
TKJ450	6	1	TR≤45	3900	1400	CO 750×2100	1350×900×2200	1850×1550
TKJ630	8	1	TR≤45	3900	1400	CO 800×2100	1400×1100×2200	1900×1750
		1.5	25≤TR≤65	4000	1500			
TKJ800	10	1.75	35≤TR≤80	4300	1500	CO 800×2100	1400×1350×2200	1900×2000
		1	TR≤45	3900	1400			
		1.5	25≤TR≤65	4000	1500			
TKJ1000	13	1.75	35≤TR≤80	4300	1500	CO 900×2100	1600×1400×2200	2100×2050
		2	40≤TR≤90	4400	1600			
		1	TR≤45	3900	1400			
TKJ1150	15	1.5	25≤TR≤65	4000	1500	CO 900×2100	1800×1400×2200	2300×2050
		1.75	35≤TR≤80	4300	1600			
		2	40≤TR≤90	4400	1600			
TKJ1250	16	1	TR≤45	4100	1400	CO 1100×2100	2000×1400×2200	2600×2100
		1.5	25≤TR≤65	4200	1500			
		1.75	35≤TR≤80	4300	1600			
TKJ1350	18	2	40≤TR≤90	4600	1700	CO 1100×2100	2000×1500×2200	2500×2150
		1	TR≤45	4200	1500			
		1.5	25≤TR≤65	4300	1600			
TKJ1600	21	1.75	35≤TR≤80	4400	1600	CO 1200×2100	2100×1600×2200	2600×2250
		2	40≤TR≤90	4600	1700			
		1	TR≤45	4200	1500			

• MRL PASSENGER ELEVATOR | Drawing

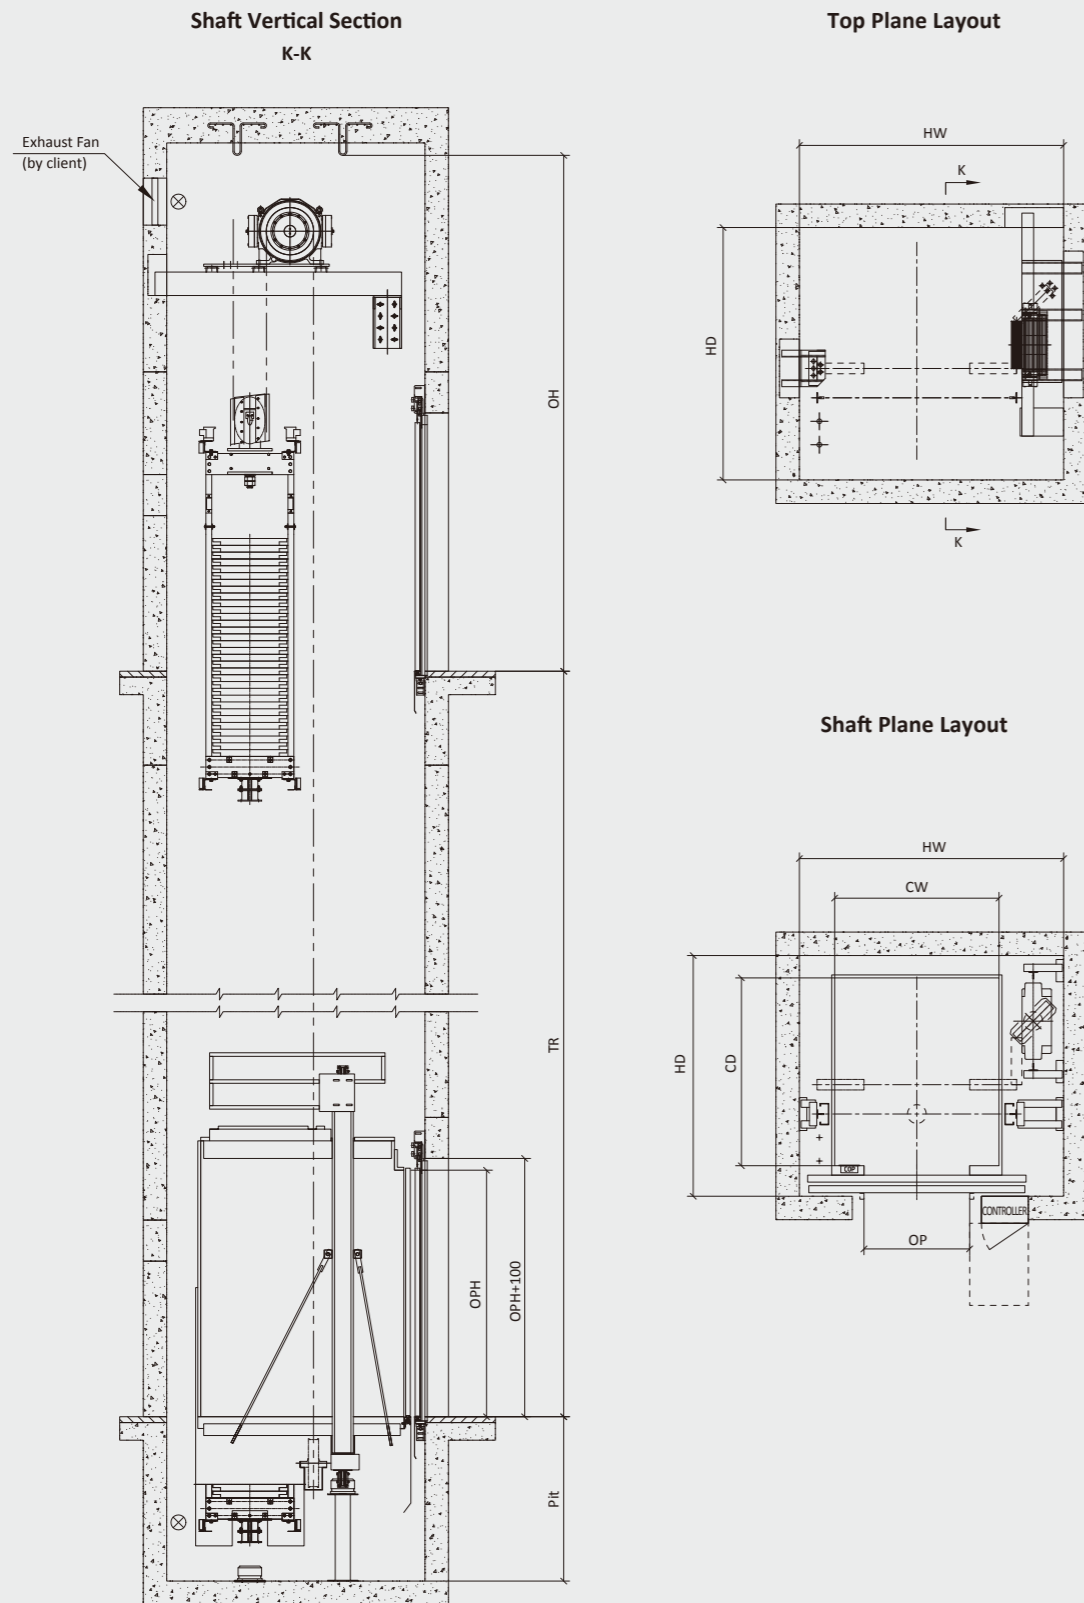

| Parameter Table

Type	Persons	Rated Speed (m/s)	TR (m)	OH (mm)	Pit (mm)	Opening Size(WxD) OPxOPH (mm)	Car Size (WxDxH) CWxCDxCH (mm)	Shaft Size (WxD) HWxHD (mm)
TWJ450	6	1	TR≤45	3800	1400	CO 750x2100	900x1350x2200	1900x1750
TWJ630	8	1	TR≤45	3500*	1100*	CO 800x2100	1100x1400x2200	1850x1800
		1	TR≤45	3800	1400		1100x1400x2200	2000x1850
		1.5	25≤TR≤65	4000	1500			
		1.75	35≤TR≤80	4000	1600			
TWJ800	10	1	TR≤45	4000	1400	CO 800x2100	1350x1400x2200	2200x1850
		1.5	25≤TR≤65	4200	1500			
		1.75	35≤TR≤80	4200	1600			
TWJ1000	13	1	TR≤45	3500*	1100*	SO 900x2100	1100x2100x2200	1750x2550
		1	TR≤45	4000	1400	CO 900x2100	1400x1600x2200	2250x2050
		1.5	25≤TR≤65	4200	1500			
		1.75	35≤TR≤80	4200	1600			
TWJ1150	15	1	TR≤45	4300	1400	CO 900x2100	1400x1800x2200	2400x2250
		1.5	25≤TR≤65	4500	1500			
		1.75	35≤TR≤80	4500	1600			
TWJ1250	16	1	TR≤45	4400	1500	CO 1000x2100	1400x2000x2200	2550x2450
		1.5	25≤TR≤65	4500	1600			
		1.75	35≤TR≤80	4500	1700			
TWJ1350	18	1	TR≤45	4400	1500	CO 1000x2100	1500x2000x2200	2600x2450
		1.5	25≤TR≤65	4500	1600			
		1.75	35≤TR≤80	4500	1700			
TWJ1600	21	1	TR≤45	4500	1600	CO 1100x2100	1600x2100x2200	2700x2500
		1.6	25≤TR≤65	4600	1700			
		1.75	35≤TR≤80	4600	1800			

* Only for non-standard without inspection